


AVERY DENNISON MARKETING SPECIFICATION

HISTORY

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

REV.	DATE	DESCRIPTION
M	10.29.14	REDRAWN IN NEW FORMAT, ADDED UL INFORMATION AND LOGO
N	07.21.16	UPDATED DIM 3, CHG FROM 1.15mm/.64mm TO 1.02mm

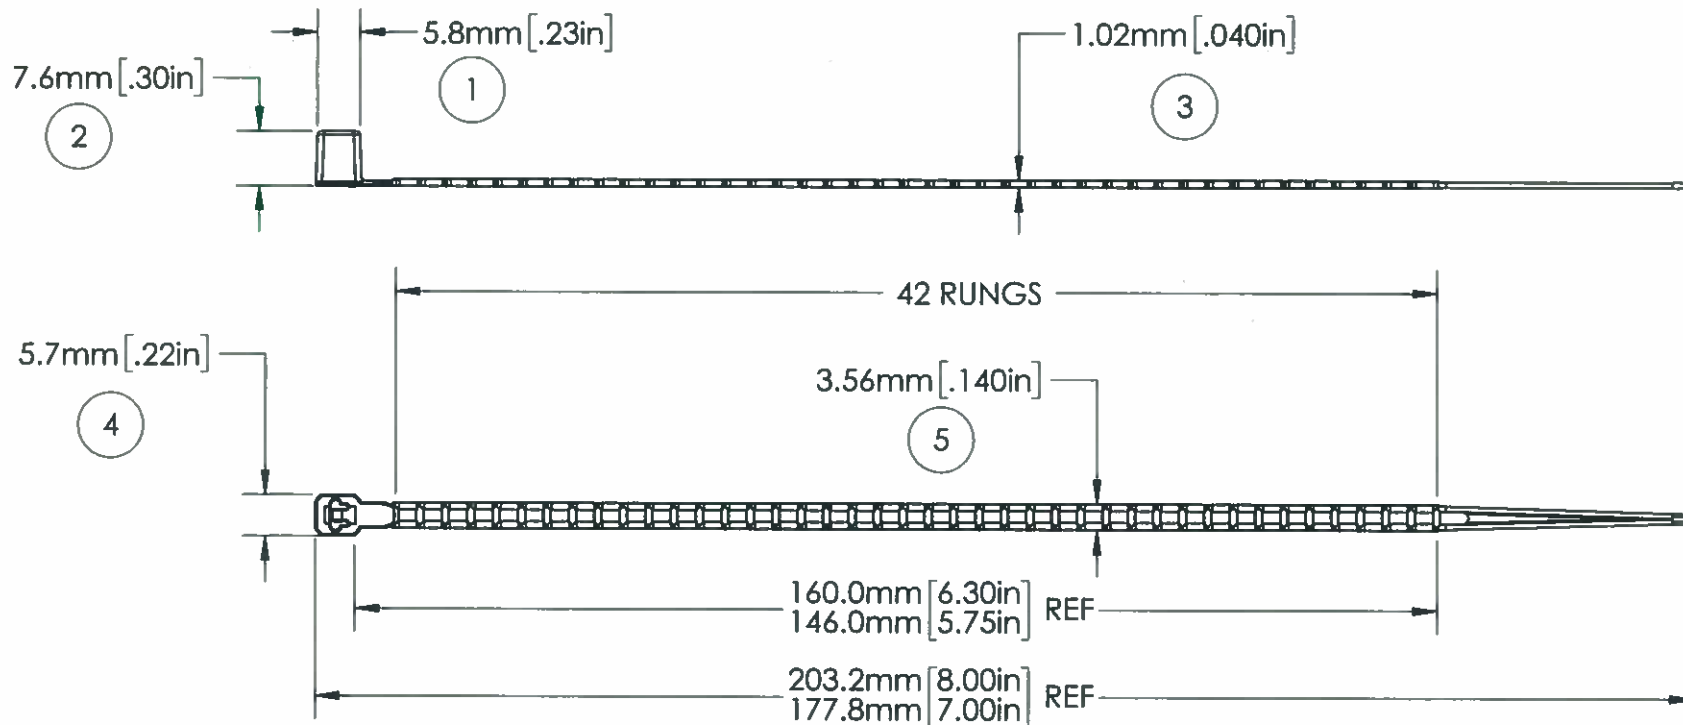

NOTE: THESE CABLE TIES ARE PLENUM RATED AND HAVE A FLAMMABILITY RATING OF V-2



LOOP TENSILE STRENGTH:	40 LBF/180 N MIN, PER AS-23190
OPERATING TEMP RANGE:	-40°F (-40°C) TO 221°F (105°C)
MIN. INSTALLATION TEMP:	32°F (0°C)
WEIGHT:	0.51 g. / (0.01734 oz)
BUNDLE DIAMETER:	Ø 1.6mm TO Ø 44.5mm(0.06" - 1.75")
TOOL:	12001-0 - HAND TOOL 12500-0 - PNEUMATIC TOOL
PACKAGING:	1000/BAG, 5000/CASE

APPROVALS: ENG. APPR. *M. O. O. 7/26/2017*
Q.A. APPR. *J. Boyle 7/26/2017*

SPECIFIED TOLERANCES ARE:
.XX ± .03 INCHES .X ± .7 mm
.XXX ± .010 INCHES .XX ± .25 mm
ANGULAR: ± 2°

MATERIAL
NYLON 6/6 HEAT STABILIZED
COLOR
BLACK

AVERY DENNISON FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION
7" CABLE TIE, LADDER

STOCK NO. **08472-0** REV. **N**