


AVERY DENNISON MARKETING SPECIFICATION

HISTORY		
REV.	DATE	DESCRIPTION
H	06.04.15	REDRAWN IN NEW FORMAT, ADDED UL INFORMATION AND LOGO

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

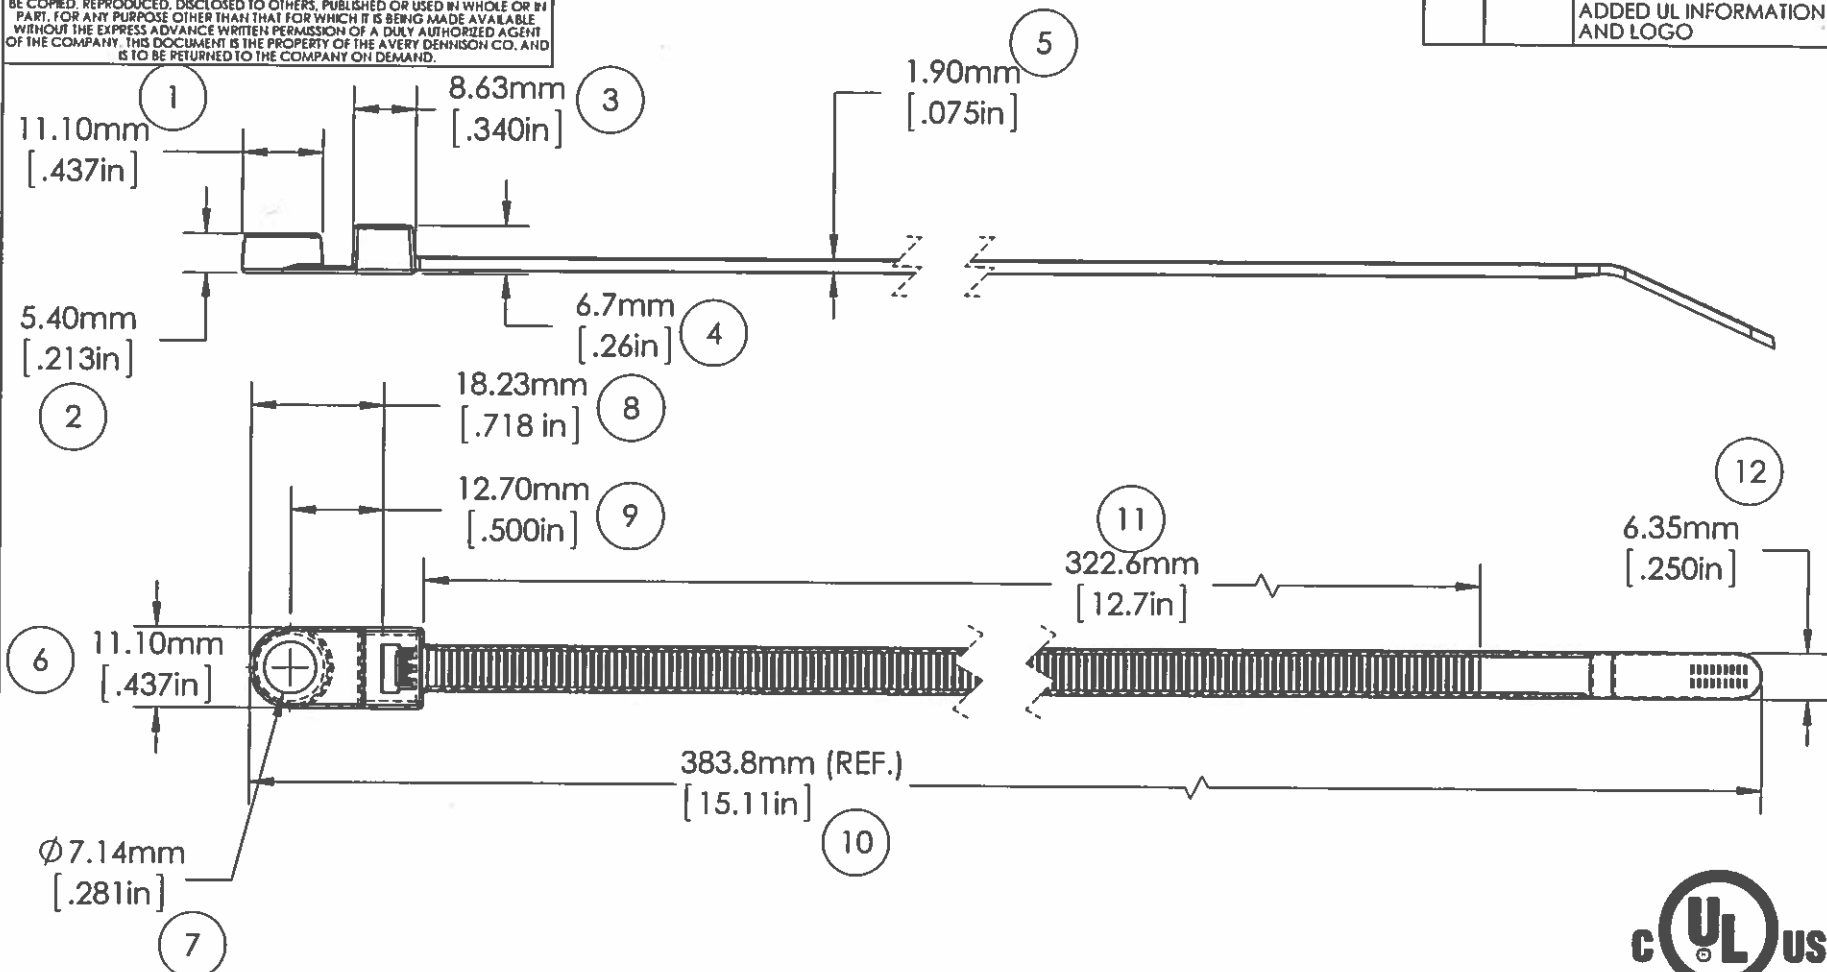

NOTE: THESE CABLE TIES ARE PLENUM RATED AND HAVE A FLAMMABILITY RATING OF V-2



MOUNTING:	1/4" SCREW
LOOP TENSILE STRENGTH:	120 LBF/534 N MIN. PER AS-23190
OPERATING TEMP RANGE:	-40°F (-40°C) TO 185°F (85°C)
MIN. INSTALLATION TEMP:	32°F (0°C)
WEIGHT:	4.89 g. / (0.1663 oz)
BUNDLE DIAMETER:	Ø26.9mm TO Ø88.9mm (1.06"-3.5")
TOOL:	TOOL HAND ADJUSTABLE, FOR PLASTIC TIE DOWN STRAP, HEAVY DUTY, PER MS90387-2
TOOL TENSION SETTING:	6-8 ON HEAVY DUTY TOOL
PACKAGING:	100 PACKS IN SEALED BAGS (50 PACKS AVAILABLE)

APPROVALS:	ENG. APPR. <i>[Signature]</i> 06-04-05
	Q.A. APPR. <i>[Signature]</i> 6-4-15

SPECIFIED TOLERANCES ARE:	
.XX ± .03 INCHES	.X ± .7 MM
.XXX ± .010 INCHES	.XX ± .25 MM
ANGULAR: ± 2°	

MATERIAL	NYLON 6/6
COLOR	NATURAL

AVERY DENNISON <small>FASTENER DIVISION FRITCHBURG, MA 01420 U.S.A. TEL: 1-800-225-5913 FAX: 978-353-8157</small>	DESCRIPTION	REV.
	14.5" CABLE TIE, STANDARD 1/4" SCREW MOUNT	H
	STOCK NO.	
	10035-0	