


# AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

| HISTORY |         |  |
|---------|---------|--|
| REV.    | DATE    | DESCRIPTION  |
| P       | 2.25.15 | REDRAWN IN NEW FORMAT, ADDED UL INFORMATION AND LOGO |

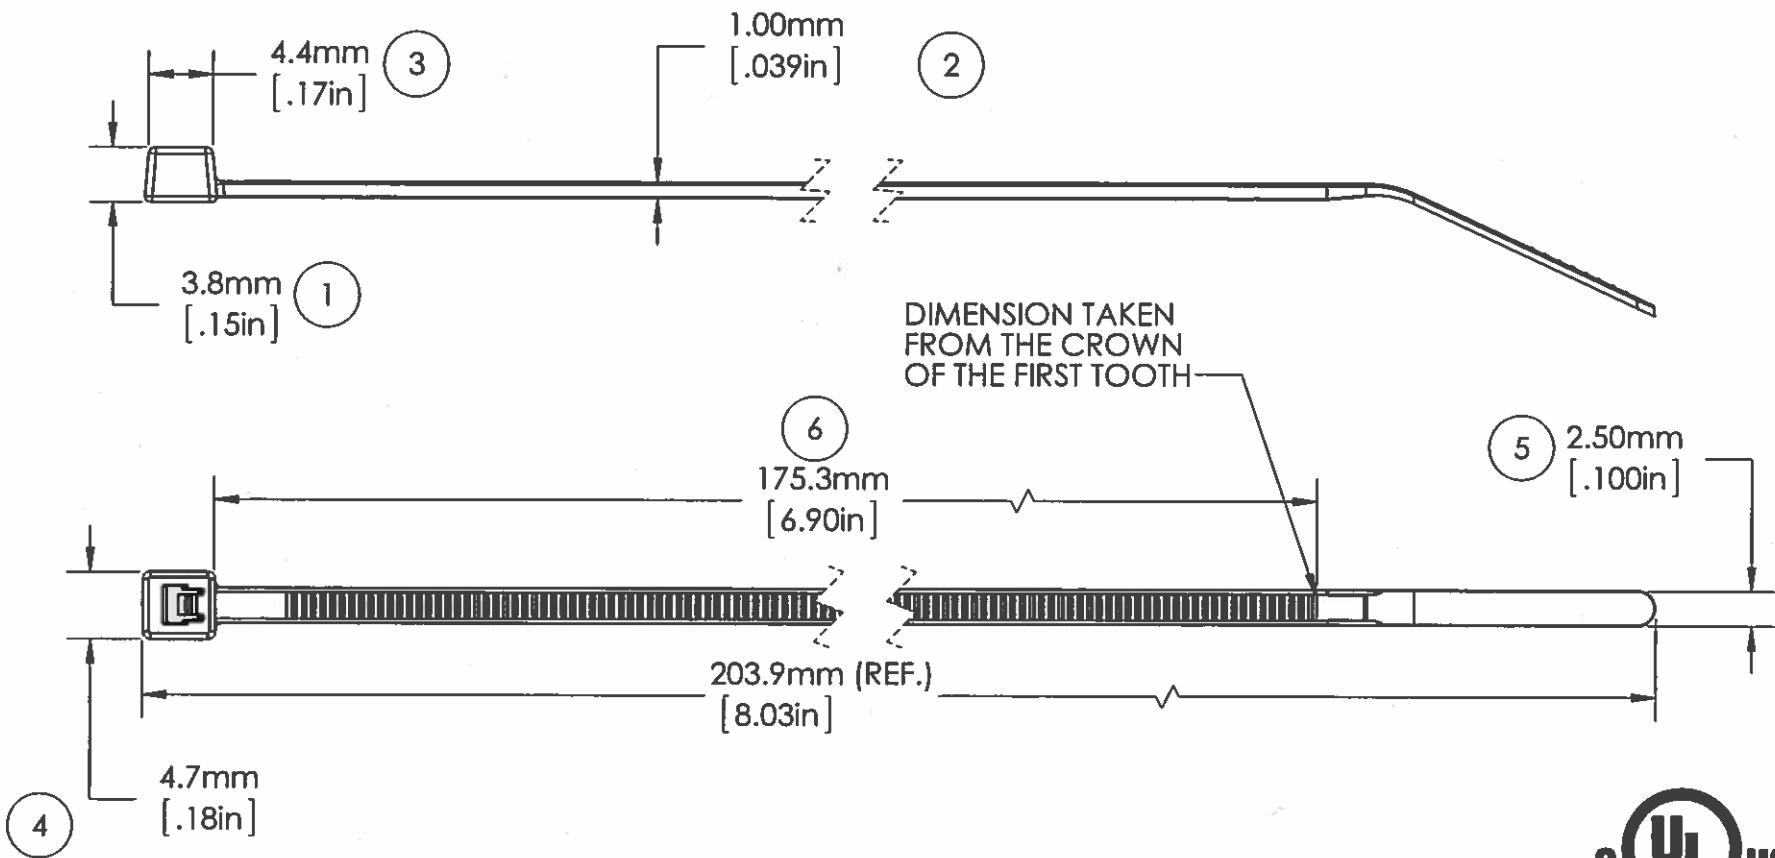

|                         |   |
|-------------------------|---|
| LOOP TENSILE STRENGTH:  | 18 LBF/80 N MIN. PER AS-23190                   |
| MILITARY STANDARD:      | MS-3367-4-0                                     |
| OPERATING TEMP RANGE:   | -40°F (-40°C) TO 176°F (80°C)                   |
| MIN. INSTALLATION TEMP: | 32°F (0°C)                                      |
| WEIGHT:                 | 0.49g. / (0.01672 oz)                           |
| BUNDLE DIAMETER:        | Φ 1.6mm TO Φ 54mm(0.06" -2.13")                 |
| TOOL:                   | 12001-0 - HAND TOOL<br>12500-0 - PNEUMATIC TOOL |
| TOOL TENSION SETTING:   | 1-3   |
| PACKAGING:              | 100/BAG, 5000/CASE                              |

NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V-2

**APPROVALS:** ENG. APPR. *[Signature]* 2/26/15  
Q.A. APPR. *[Signature]* 2/26/15

**SPECIFIED TOLERANCES ARE:**  
 .XX ± .03 INCHES .X ± .7 MM  
 .XXX ± .010 INCHES .XX ± .25 MM  
 ANGULAR: ± 2°



|  |                                |  |
|--|--------------------------------|--|
| <b>AVERY DENNISON</b><br><small>FASTENER DIVISION<br/>FRIBURG, MA 01420 U.S.A.<br/>TEL. 1-800-225-5913<br/>FAX. 978-353-8157</small> | DESCRIPTION                    |  |
|  | <b>8" CABLE TIE, SLIM-LINE</b> |  |
| STOCK NO.  | REV.                           |  |
| <b>10330-0</b>   | <b>P</b>                       |  |