


# AVERY DENNISON MARKETING SPECIFICATION

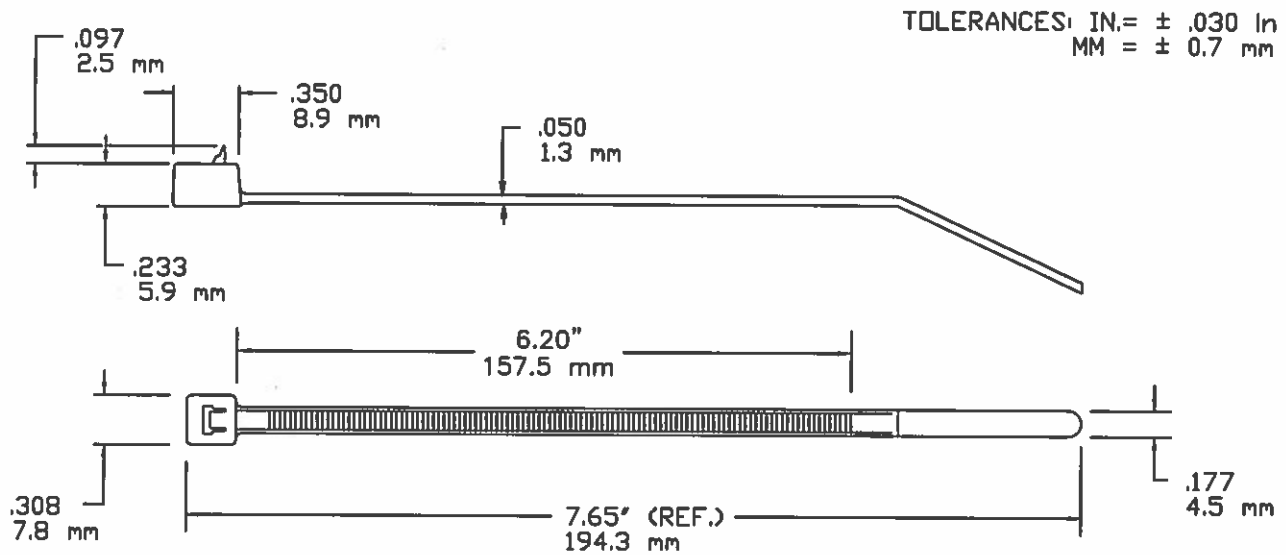

TOLERANCES: IN. = ± .030 in  
MM = ± 0.7 mm

NOT TO SCALE

LOOP TENSILE STRENGTH:	50 LBF / 220N MIN. PER AS-23190
OPERATING TEMPERATURE:	-40°F (-40°C) TO 176°F (80°C)
MIN. INSTALLATION TEMP:	32°F (0°C)
MATERIAL:	NYLON 6/6
WEIGHT:	.04838 oz. / 1.42 grams
BUNDLE DIAMETER:	Ø0.063"/1.59mm TO Ø1.75"/44mm
PACKAGED IN:	1000/BAG, 5000/CASE

NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V2.



FASTENER DIVISION  
FITCHBURG, MA 01420 U.S.A.  
TEL. 1-800-225-5913  
MA. 978-353-8157



**E57800  
TYPE11**

**DESCRIPTION:**

7.5" / 190mm CABLE TIE, RELEASABLE  
BLACK WEATHER RESISTANT

**APPROVAL:**

*J. Boyle 9-18-2015*

**STOCK NO.**

10363-0

**REV**

F