


AVERY DENNISON MARKETING SPECIFICATION

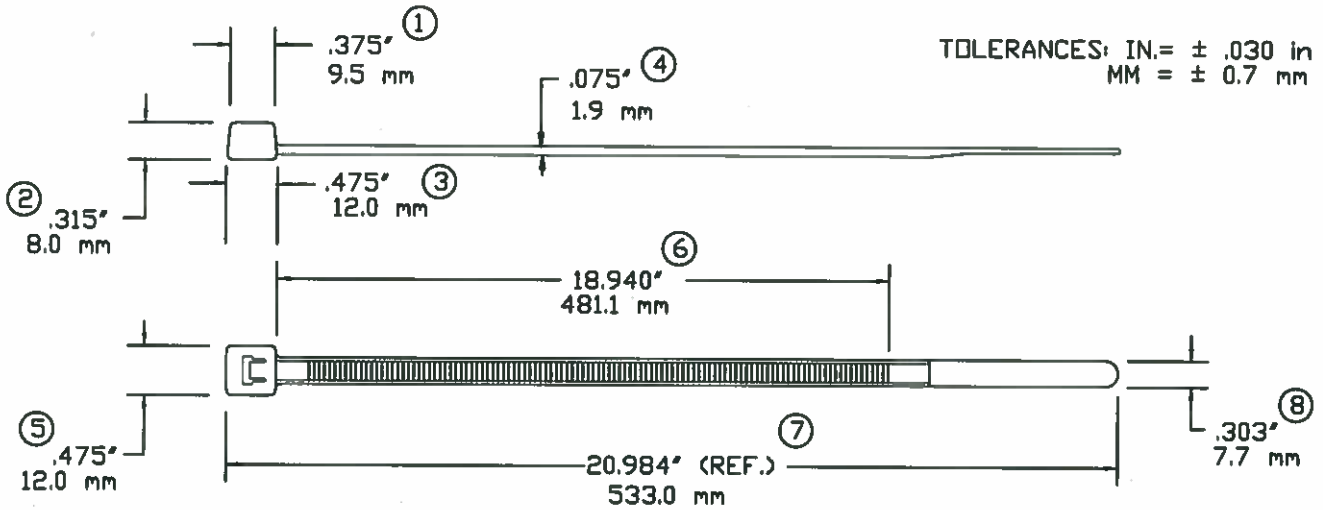

NOT TO SCALE

| | |
|-------------------------|-------------------------------------|
| LOOP TENSILE STRENGTH: | 120 LBF / 534N MINIMUM PER AS-23190 |
| OPERATING TEMPERATURE: | -40°F(-40°C) TO 221°F(105°C) |
| MIN. INSTALLATION TEMP: | 32°F(0°C) |
| MATERIAL: | NYLON 6/6 |
| WEIGHT: | .2924 OZ./8.3 GRAMS |
| BUNDLE DIAMETER: | ∅.250"/4.76mm TO ∅6.0"/152.4mm |
| TOOL TENSION SETTING: | 6-8 ON HEAVY DUTY TOOL |
| PACKAGED IN: | 50/BAG, 1,000/CASE |

NOTE: THESE CABLE TIES ARE PLENUM RATED AND HAVE A FLAMMABILITY RATING OF V-2.



FASTENER DIVISION
 FITCHBURG, MA 01420 U.S.A.
 TEL. 1-800-225-5913
 FAX. 1-800-848-2169

DESCRIPTION:

21" / 533mm CABLE TIE, HEAVY DUTY
 BLACK HEAT STABILIZED

APPROVAL:

J. Boyle 9-15-2015

STOCK NO.

10607-0

REV

H